

IMAGE



XLT
SmartSolutions™

Domestic

MODEL
3270-1B H-version

SIZE
32" WIDE CONVEYOR
70" LONG BAKE CHAMBER

TYPE
GAS

Features	Advantages	Benefits
10 - Year Warranty (Parts & Labor)	No out-of-pocket repair fee for 10 years. Lower the total cost of ownership.	Worry-free operation. When you need help, it is just a phone call away.
All Stainless Steel Inside & Out	More robust construction. Rust-free, durable, and chemical-resistant material.	With proper care and cleaning, the oven will continue to look as good as new.
Removable Front Panel	Provides full access to the bake chamber. No tools are required to remove and reassemble.	Easy and fast access for cleaning the interior of the oven.
Touch Oven Control	Quick adjustment of time and temp. Informational "status" LEDs provide fault messages and maintenance reminders.	Easy-to-understand oven operations for novice to experienced users.
Bi-Directional Conveyor Belt	Curved edges. Ability to change direction without disassembly.	Reduces the possibility of the belt edge catching and tangling. Reducing potential downtime.
Magnetic Sandwich Door	Provides easy/safe front access to the bake chamber.	For alternative cooking options. For shorter cook times.
Exit Product Stop	Product stop on the exit side from falling off the conveyor.	Reduces constant supervision. Eliminating the chance to remake a 'gone-over-the-edge' product.
Extended Front Panels	Surface area is cool to touch.	Safer working conditions. Less chance for an employee to get burned.
Lifting Handles	Foldable. Ability to grip front panel.	Safely remove and reassemble the front panel.
Gas Hose	3/4" x 60" heavy-duty corrugated stainless steel hose with protective PVC coating. Includes oven-side quick disconnect fitting.	Included with each deck. Makes installation easy with the included gas hose kit.

3270H-1B Bake Specification Chart

Product	Screen Diameter (inches)	Screen Width (inches)	Capacity (per hour per oven)
X-Large	16	2	99
Large	14	2	112
Medium	12	2	129
Small	10	2	153
Papadia	9	3	252

3270H-1B Approved Time and Temperatures

	Conveyor Belt Times	Operating Temp range
Maximum	5:00	440°F (plus or minus 10°F) 227°C (plus or minus 6°C)

Oven Weight	Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	1169 lbs	530 kg	2119 lbs	961 kg	3064 lbs	1390 kg
With Domestic Wood Crate Pallet	1317 lbs	597 kg	2415 lbs	1095 kg	3508 lbs	1591 kg

*All weights shown are for guidance only. They are calculated using the most common configuration.

Crate Dimensions	Width		Depth		Height	
Domestic Wood Crate Pallet	115 ½ inches	2937 mm	31 ½ inches	803 mm	71 ½ inches	1816 mm



PAPAJOHNS®
Better Ingredients. Better Pizza.


3270H-1B Spec. 2023 PJ V1



(316) 943-2751
SALES@XLTOVENS.COM
SERVICE@XLTOVENS.COM

WWW.XLTOVENS.COM
24/7/365 LIVE TECHNICAL SUPPORT

TOP VIEW

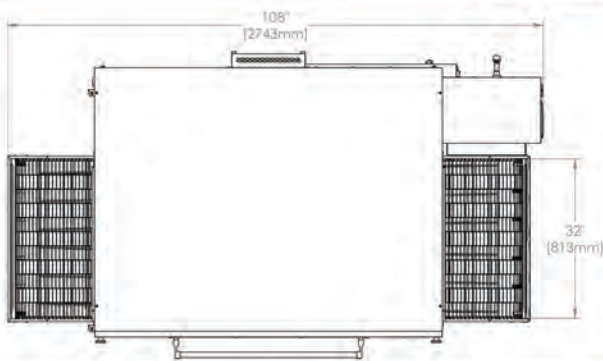

XLT
SmartSolutions™

MODEL

3270-1B H-version

WARRANTY

10 Years Parts & Labor


TECH SUPPORT

24/7/365

FRONT VIEWS

SIDE VIEWS

BACK VIEWS

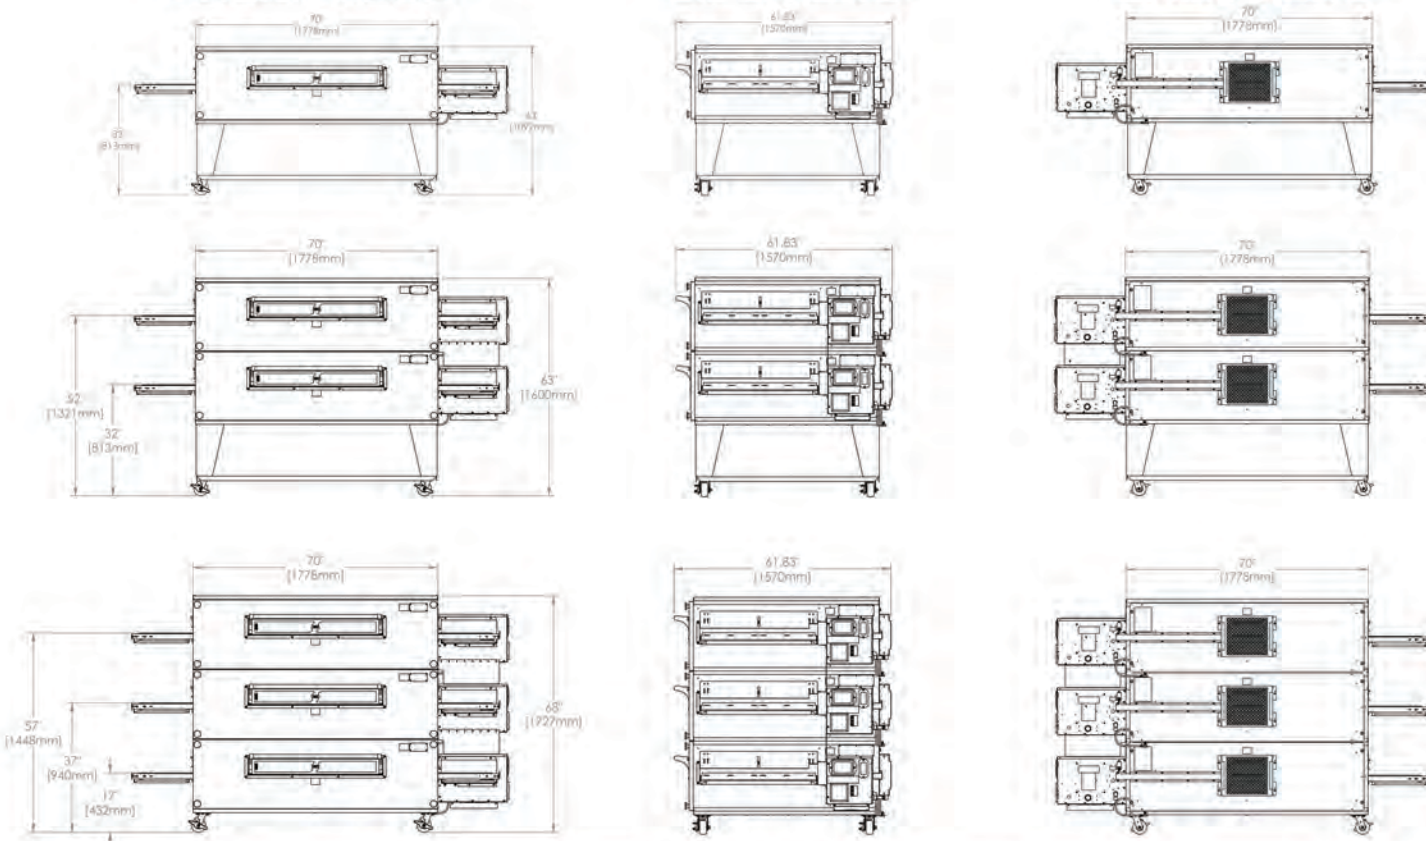

Heating Value

Standard	World		
	Natural	Propane	Butane
150,000 BTU/Hr	43.90 Kw/Hr	45.40 Kw/Hr	43.90 Kw/Hr
	158.26 Mj/Hr	163.44 Mj/Hr	

Electrical Requirement

Standard	World
120 VAC, 4.8 Amps, 50/60 Hz	220/230/240 VAC Option, 3 Amps, 50/60 Hz

Inlet Pressure Range

	W/C	mbar	kPa	kPa (Korea)
Natural Gas	6-14	15-35	1.50 - 3.50	1.50 - 2.50
Propane Gas	11 - 14	27.5 - 35	2.75 - 3.50	2.30 - 3.30

Manifold Pressure Range

	W/C	mbar	kPa
Natural Gas	3.5	8.75	0.875
Propane Gas	10	25	2.50

*A MINIMUM OF A 1 1/2" GAS SUPPLY LINE IS REQUIRED. THE GAS LINE MUST BE PLACED TO THE SIDE OF THE OVEN AND CANNOT BE BEHIND THE CONTROL BOX. POWER CABLES NOT INCLUDED DUE TO MARKET SPECIFIC ADHERENCE TO CODE REQUIREMENTS.

3270H-1B Spec. 2023 PJ V1


(316) 943-2751
SALES@XLTOVENS.COM
SERVICE@XLTOVENS.COM

WWW.XLTOVENS.COM
24/7/365 LIVE TECHNICAL SUPPORT



Reference	Description	Date	By
H03	Removed (4) XF-152, (4) XF-205, (1) XM-8011A-B, (1) XM-8011A-T; Customer Approved	1/25/2023	RWP

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001C-32-T	Finger Body 32xx Top No Ramp	6
3	XF-110	1/4"-14 Thd Fmg Screw	13
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8683E	Finger Inner Plate Perforated	2
6	XM-8004-8689E	Finger Inner Plate Perforated	5
7	XM-8004-8694F	Finger Inner Plate Perforated	5
8	XM-8010D-xx70-B	Finger Support Angle	1
9	XM-8010D-xx70-T	Finger Support Angle	1
10	XM-8024B-xx70	Return Air Plate	5
11	XM-8025B-3240-xx70	Endloss Plate	2
12	XM-8493E	32xx Finger Outer Plate	1
13	XM-8622E	32xx Finger Outer Plate	5
14	XM-8694F	32xx Finger Outer Plate	5
15	XM-8698E	32xx Finger Outer Plate	1
16	XM-8699E	32xx Finger Outer Plate	1

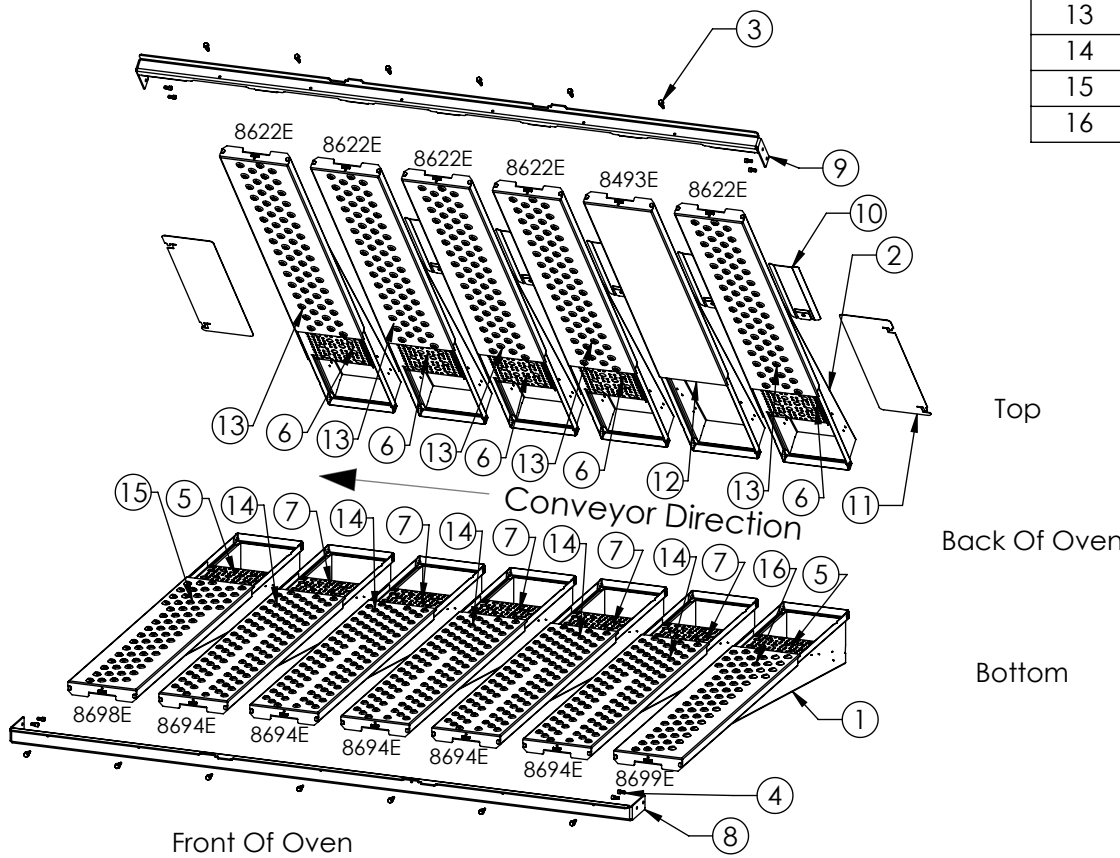

This Finger Chart Is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B17-4-2	SQ	60 Hz	X	8/17/2021	Joel Brown
B17-6-2	SQ	50 Hz			
Legend:		Fan Style: B17 = TS2 Style (True 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW=2			


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE.
WEIGHT 187.45

WOLFE ELECTRIC INC WICHITA, KANSAS		DESCRIPTION XLT OVENS Finger Chart Papa Johns	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES & TOLERANCES ARE: DECIMALS: .XX ±0.030 .XXX ±0.010 ANGULAR: ±1° FRACTIONS: ±1/32		MATL See BOM DWG XA-8H32701B-PapJohRL	
DRAWN BY RWP DATE 2/27/2020		SHEET 1 OF 2 DO NOT SCALE	

Reference	Description	Date	By
H03	Removed [4] XF-152, [4] XF-205, [1] XM-8011A-B, [1] XM-8011A-T; Customer Approved	1/25/2023	RWP

Approved
Joel Brown 8-17-21

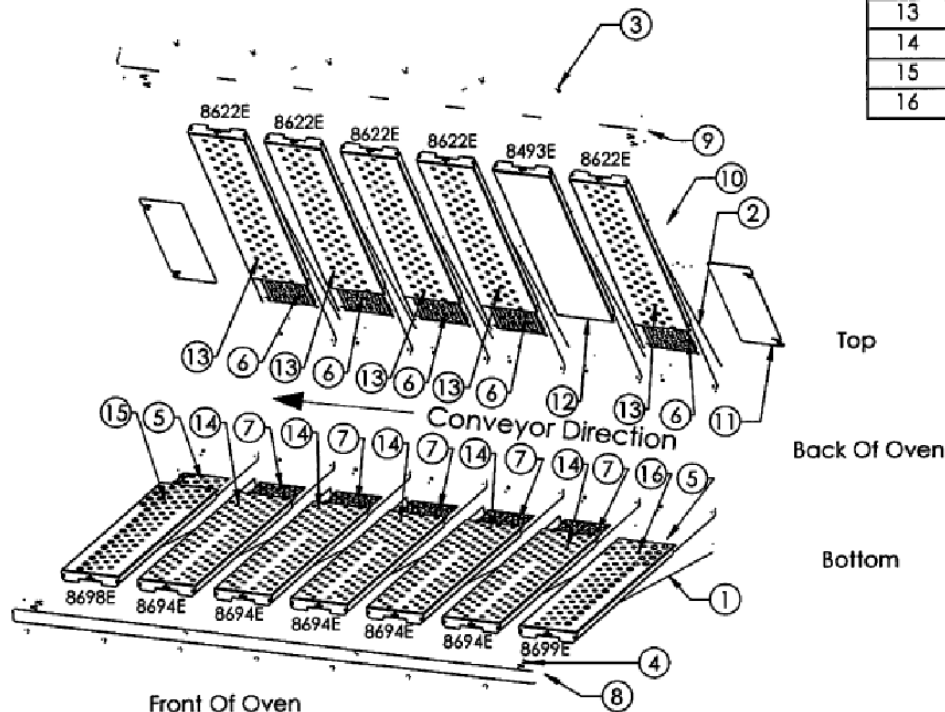

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001C-32-T	Finger Body 32xx Top No Ramp	6
3	XF-110	1/4"-14 Thd Fmg Screw	13
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8683E	Finger Inner Plate Perforated	2
6	XM-8004-8689E	Finger Inner Plate Perforated	5
7	XM-8004-8694F	Finger Inner Plate Perforated	5
8	XM-8010D-xx70-B	Finger Support Angle	1
9	XM-8010D-xx70-T	Finger Support Angle	1
10	XM-8024B-xx70	Return Air Plate	5
11	XM-8025B-3240-xx70	Endloss Plate	2
12	XM-8493E	32xx Finger Outer Plate	1
13	XM-8622E	32xx Finger Outer Plate	5
14	XM-8694F	32xx Finger Outer Plate	5
15	XM-8698E	32xx Finger Outer Plate	1
16	XM-8699E	32xx Finger Outer Plate	1

This Finger Chart is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B17-4-2	SQ	60 Hz	X	8/17/2021	Joel Brown
B17-6-2	SQ	50 Hz			
Legend: Fan Styles: B17 = IS2 Style (True 1/7) No. Of Fan Blades: 3, 4 or 6 Fan Rotations: CW = 1, CCW = 2					

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 188.20

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS
Finger Chart Papa Johns

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY RWP DATE 2/27/2020

MATL See BOM

DWG

XA-8H32701B-PapJohRL

SHEET 1 OF 2
DO NOT SCALE

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS
Finger Chart Papa Johns

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY RWP DATE 2/27/2020

MATL See BOM

DWG

XA-8H32701B-PapJohRL

SHEET 2 OF 2
DO NOT SCALE


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 187.45

Reference	Description	Date	By
H03	Removed (4) XF-152, (4) XF-205, (1) XM-8011A-B, (1) XM-8011A-T; Customer Approved	1/25/2023	RWP

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001C-32-T	Finger Body 32xx Top No Ramp	6
3	XF-110	1/4"-14 Thd Fmg Screw	13
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8683E	Finger Inner Plate Perforated	2
6	XM-8004-8689E	Finger Inner Plate Perforated	5
7	XM-8004-8694F	Finger Inner Plate Perforated	5
8	XM-8010D-xx70-B	Finger Support Angle	1
9	XM-8010D-xx70-T	Finger Support Angle	1
10	XM-8024B-xx70	Return Air Plate	5
11	XM-8025B-3240-xx70	Endloss Plate	2
12	XM-8493E	32xx Finger Outer Plate	1
13	XM-8622E	32xx Finger Outer Plate	5
14	XM-8694F	32xx Finger Outer Plate	5
15	XM-8698E	32xx Finger Outer Plate	1
16	XM-8699E	32xx Finger Outer Plate	1

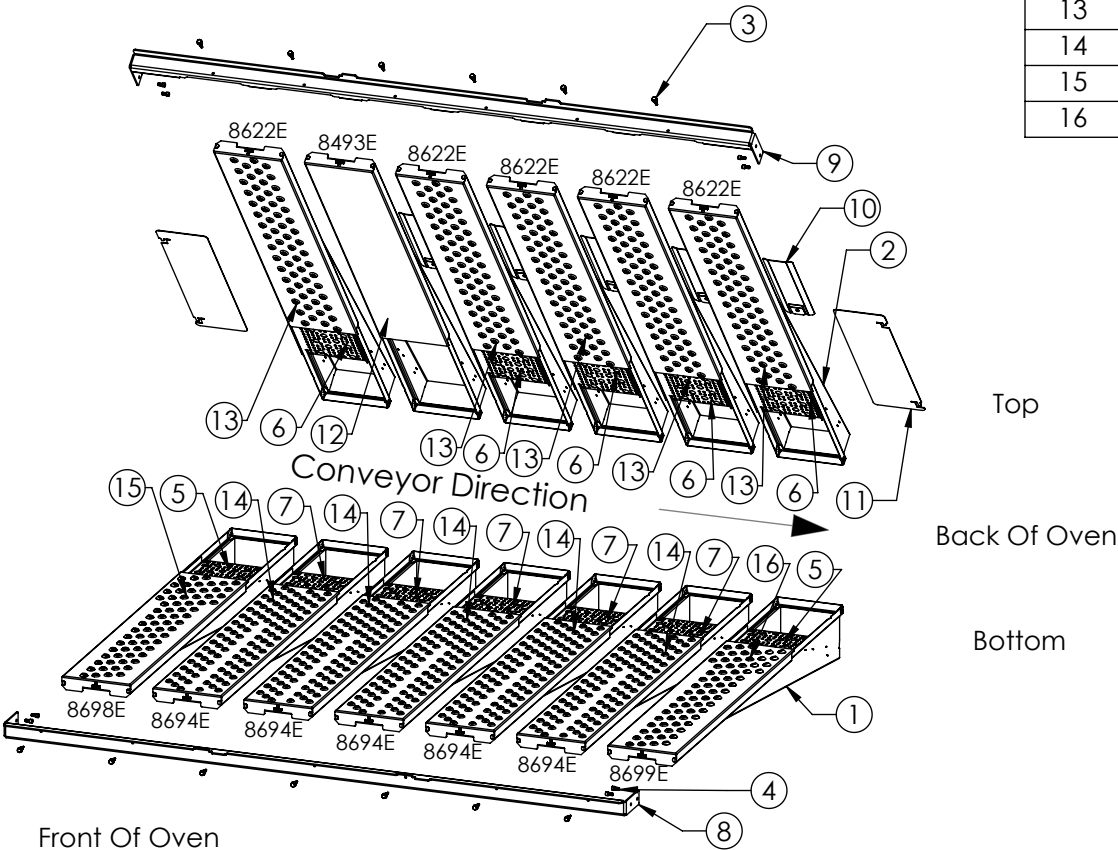

This Finger Chart Is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B17-4-2	SQ	60 Hz	X	8/17/2021	Joel Brown
B17-6-2	SQ	50 Hz			
Legend:		Fan Style: B17 = TS2 Style (True 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW=2			

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 188.20

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32

DRAWN BY RWP DATE 2/27/2020

DESCRIPTION
XLT OVENS
Finger Chart Papa Johns

MATL See BOM

DWG XA-8H32701B-PapJohLR

SHEET 1 OF 2
DO NOT SCALE


Rev	Description	Date	By
1	Released For Customer Approval	11/18/2020	JMD
2	XM-8010C-xx70-B Was XM-8010D-xx70-B; XM-8010C-xx70-T Was XM-8010D-xx70-T	12/10/2020	JSP

Approval

By: 

Date: 8/17

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001C-32-T	Finger Body 32xx Top No Ramp	6
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8683E	Finger Inner Plate Perforated	2
5	XM-8004-8689E	Finger Inner Plate Perforated	5
6	XM-8004-8694F	Finger Inner Plate Perforated	5
7	XM-8010C-xx70-B	Finger Support Angle	1
8	XM-8010C-xx70-T	Finger Support Angle	1
9	XM-8013A-S	Finger Retainer Clip	13
10	XM-8024B-xx70	Return Air Plate	5
11	XM-8025B-3240-xx70	Endlost Plate	2
12	XM-8493E	32xx Finger Outer Plate	1
13	XM-8622E	32xx Finger Outer Plate	5
14	XM-8694F	32xx Finger Outer Plate	5
15	XM-8698E	32xx Finger Outer Plate	1
16	XM-8699E	32xx Finger Outer Plate	1

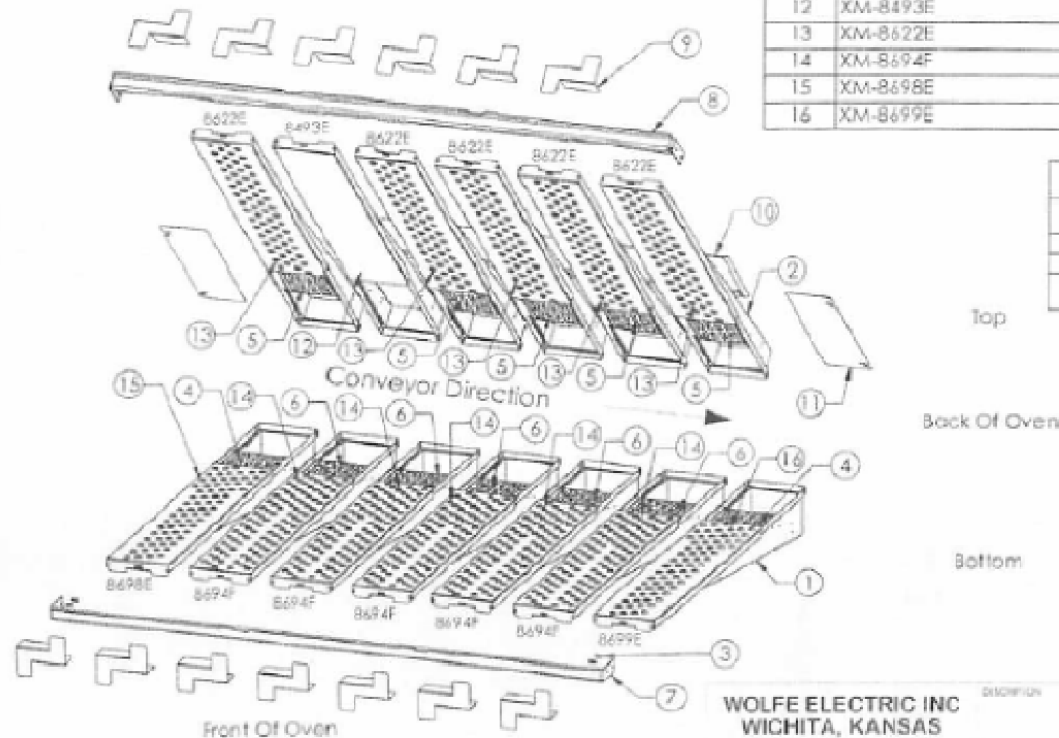

This Table Chart Is Only Applicable For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Apert.	Date	Design Variation
B17-4-2	SS	60 Hz			
B17-4-2	SS	60 Hz			
Fan Style: B17 = 1/2 Size (Bus 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: Clock or Counter-clockwise					

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE/ONCHS APPROVAL/CHANG RELEASE/CHANG

193.53

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY: JMD DATE: 11/18/2020

DESCRIPTION

MATL: See BOM

ENG: JMD

XLT OVENS
Finger Chart Papa Johns

XA-8H32701B-PapJohLR

SHEET 1 OF 1
DO NOT SCALE

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY: RWP DATE: 2/27/2020

DESCRIPTION

MATL: See BOM

DWG

XLT OVENS
Finger Chart Papa Johns

XA-8H32701B-PapJohLR

SHEET 2 OF 2
DO NOT SCALE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT

188.20

IMAGE




XLT
SmartSolutions™

MODEL



3270H-1B

F-Version Hood



TOP VIEW

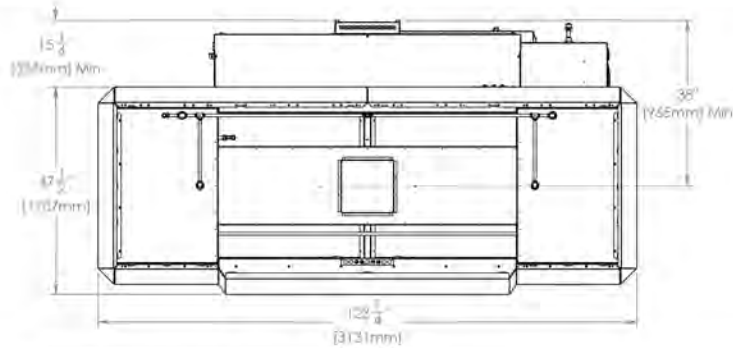

FRONT VIEWS

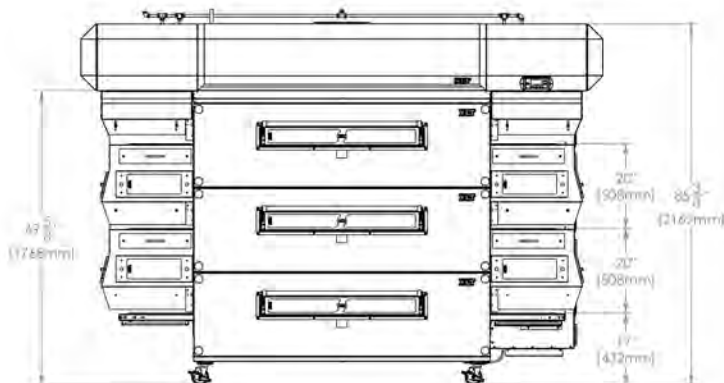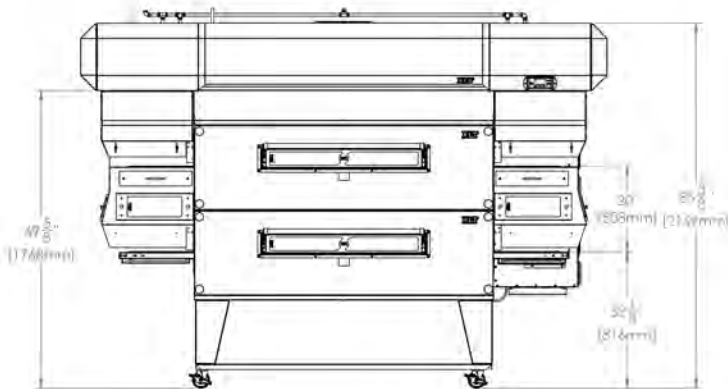

SIDE VIEWS

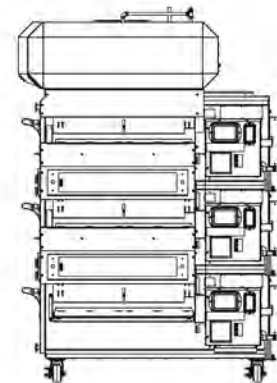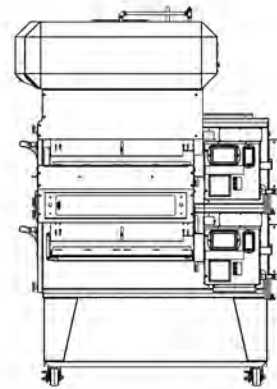

3270-1B**MODEL****F-Version****XLT**
SmartSolutions™**DATA SHEET****F-VERSION HOOD FOR XLT 3270-1B OVEN****ELECTRIC UTILITY SPECIFICATIONS**

<i>Inputs Into Electrical</i>		
	Standard	World
VAC	208/240 VAC	230 VAC
Amps	3 Amps	3 Amps
Hz	60 Hz	50 Hz
Phase	1 Phase	1 Phase

*Do not connect to 3 phase power. 1 phase only.

<i>Output From Electrical</i>	
The XLT Hood System Provides:	
Up to three (3) switching outputs for HVAC damper and/or dedicated unit.*	
One (1) 230 VAC, 4.3 Amp, variable frequency, three (3) phase power output for the ventilation exhaust fan. (Maximum output: 10 Amp)*	
Relocation cord will physically connect into oven.	
One (1) 24 VDC fire alarm signal.*	Up to three (3) receptacles for ovens.

*VFD only.

HOOD AND SHROUDS WEIGHT

	<i>Hood Only</i>		<i>Hood & Shrouds</i>			
			<i>Double</i>		<i>Triple</i>	
	lbs	kg	lbs	kg	lbs	kg
Hood and/or Shrouds Only	425	193	655	297	722	327

EXHAUST FLOW RATES

	<i>Double Stack</i>	<i>Triple Stack</i>
CFM (All Ovens On)	670	960
M3/Min (All Ovens On)	18.97	27.18
Efficiency Comparison	19.08% More Efficient Than E-Version	23.44% More Efficient Than E-Version

*Figures represent TOTAL VOLUME measured at the duct (Minimum recommended). Refer to XLT Ovens I&O Manual for full complete information.

EXHAUST FAN AND CURB

	<i>Specs</i>					
	inches	mm	inches	mm	inches	mm
Dimensions	31	787	31	787	67	1702
Crated Weight (Stacked)	lbs	kg				
	185	84				

OVEN & HOOD WARRANTY

<i>USA & Canada (Parts & Labor)</i>	<i>International (Parts & Labor)</i>
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard

*Pre-piped fire suppression system must be purchased on each oven and hood.



13161 943-2751
 SALES@XLTOVENS.COM
 SERVICE@XLTOVENS.COM

WWW.XLTOVENS.COM
 24/7/365 LIVE TECHNICAL SUPPORT

